




Key Point:

1. 12.1" 4:3 TFT LED Screen.
2. Resistive touch screen panel.
3. Intel® Core™ i5-4200U Processor
4. Embedded design
5. Support 6*com, 1*485
6. Cooling fan on motherboard for heat dissipation.



Item Number	PCSPL 12.1 IPC
Product size	340*245*46mm
LCD Panel	12.1" TFT LED Screen
Resolution	1024*768
Contrast	800:1
Brightness	350cd/m2
Touch screen	Resistive touch
CPU	Intel® Core™ i5 4200U Processor 3M Cache, up to 2.60 GHz ITX
Motherboard	Motherboard
Memory	4G DDR3
Storage	128G SSD
I/O Port	4*USB, 1*LAN, 1*HDMI, 1*WIFI, 2*RS232
OS	Windows7/8/10. Linux
Shell	Entire aluminum bezel
Power supply	DC12V, AC100-240V
Stand	Standard VESA

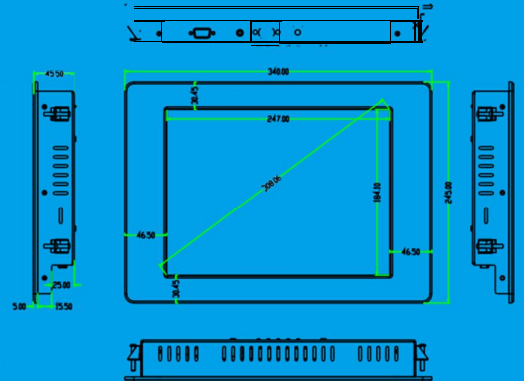

Processor	Intel® Core™ i5 4200U Processor 3M Cache, up to 2.60 GHz
Chipsets	Intel HM76
Graphics	Intel® HD Graphics 4400
Display Output	VGA, HDMI, LVDS
Memory	1*SO-DIMM DDR3L 1333/1600 MHZ Memory, Max 8GB
Sound	1* Realtek AL662 HD Board Audio Transcoding Controller
Network	1*Realtek RT8111E Gigabit Ethernet
Storage	2*SATA III, 1*M-SATA
USB	2*USB3.0 8*USB2.0 (Expansion)
COM	6*COM (Support 1*485)
Rear I/O Interface	2*USB3.0, 2*USB2.0, 1*VGA, 1*HDMI, 1*LAN, 1*AUDIO, 1*DC
I/O Interface on board	3*USB 2.0 PIN, 1*3G-SET, 2*COM SET, 2*COM PIN,
	1*VGA PIN, 1*HDMI PIN, 1*JPS1 PIN, 1*F_PANEL PIN
	1*GPIO, 1*PRINT PIN, 1*INVERT PIN, 1*LVDS PIN,
	1*LVDS-PWR, 1*ATX PIN, 1*J-1 Backlight control PIN, 1*SYS-FAN, 1*CPU-FAN, 1*SATA-SET, 2*SATA-PWR, 1*J485
BIOS	AMI BIOS
Power supply	DC and 4 PIN ATX
Cooling system	Onboard CPU Heatsink
Working Temp	-15-60℃, 0%-95%
Board size	170*170mm



Intel® Core™ i5-4200U Motherboard

